


**BUTT WELDING PIPE FITTING DIMENSIONAL STANDARD ANSI B-16.9, B-16.28 & MS SS P43**



Nominal Pipe Size		Outside Diameter	Center to Face				Back to Face			Center to Center			Length 'L' MS SS P43	
Inch.	mm	D	A	B	C	N	E	F	G	R	M	S	L	L
1/2	15	21.3	38.00	16.0	25.0	-	25.0	48.0	-	76.0	-	35.0	50.8	76.2
3/4	20	26.7	29.00	11.0	29.0	-	25.0	43.0	-	57.0	-	43.0	50.8	76.2
1	25	33.4	38.00	22.0	38.0	25.0	38.0	56.0	41.0	76.0	51.0	51.0	50.8	101.6
1 1/4	32	42.2	48.00	25.0	48.0	32.0	38.0	70.0	52.0	95.0	64.0	64.0	50.8	101.6
1 1/2	40	48.3	57.15	29.0	57.0	38.0	38.0	83.0	62.0	114.0	76.0	73.0	50.8	101.6
2	50	60.3	76.00	35.0	64.0	51.0	38.0	106.0	81.0	152.0	102.0	93.0	63.5	152.4
2 1/2	65	73	95.25	44.0	76.0	64.0	38.0	132.0	100.0	191.0	127.0	105.0	63.5	152.4
3	80	88.9	114.30	51.0	86.0	76.0	51.0	159.0	121.0	229.0	152.0	127.0	63.5	152.4
3 1/2	90	101.6	133.35	57.0	95.0	89.0	64.0	184.0	140.0	267.0	178.0	140.0	76.2	152.4
4	100	114.3	152.0	63.0	105.0	102.0	64.0	210.0	159.0	305.0	203.0	157.0	76.2	152.4
5	125	141.3	190.0	79.0	123.0	127.0	76.0	262.0	197.0	381.0	254.0	186.0	76.2	203.2
6	150	168.3	229.0	95.0	143.0	152.0	89.0	313.0	237.0	457.0	305.0	216.0	88.9	203.2
8	200	219.1	305.0	127.0	178.0	203.0	102.0	414.0	313.0	610.0	406.0	270.0	101.6	203.2
10	250	273.1	381.0	159.0	216.0	254.0	127.0	515.0	391.0	762.0	508.0	324.0	127	254
12	300	323.9	457.0	190.0	254.0	303.0	152.0	619.0	467.0	914.0	610.0	381.0	152.4	254
14	350	355.6	533.0	222.0	279.0	356.0	165.0	711.0	533.0	1067.0	711.0	413.0	152.4	305.0
16	400	406.4	610.0	254.0	305.0	406.0	178.0	813.0	610.0	1219.0	813.0	470.0	152.4	305.0
18	450	457.2	686.0	286.0	343.0	457.0	203.0	914.0	686.0	1372.0	914.0	533.0	152.4	305.0
20	500	508	762.0	318.0	381.0	508.0	229.0	1016.0	762.0	1524.0	1016.0	584.0	152.4	305.0
22	550	559	838.0	343.0	419.0	559.0	254.0	1118.0	838.0	1676.0	1118.0	614.4	152.4	305.0
24	600	610	914.0	381.0	432.0	610.0	267.0	1219.0	914.0	1829.0	1219.0	692.0	152.4	305.0
26	650	660	991.0	406.0	495.0	660.0	267.0							
28	700	711	1067.0	438.0	521.0	771.0	267.0							
30	750	762	1143.0	470.0	589.0	762.0	267.0							
32	800	813	1219.0	502.0	597.0	813.0	267.0							
34	850	864	1295.0	533.0	635.0	864.0	267.0							
36	900	914	1372.0	565.0	673.0	914.0	267.0							

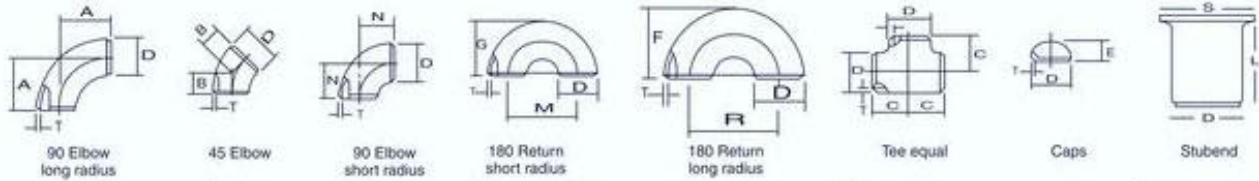